

Technical data sheet




Descriptions	Name Line	X09 Slide Light Comfort		
	Description	2-part sliding door, reversible		
	Mounting possibilities	Can be installed between 2 walls Can be combined with X19 Can be combined with stabilisation bar for conversion to a walk-in shower		
Measurements	Article	Width	Height	Entry
	X09 001 000 ###	1150 - 1190 mm	2000 mm	492 mm
	X09 002 000 ###	1350 - 1390 mm	2000 mm	592 mm
	X09 003 000 ###	1550 - 1590 mm	2000 mm	692 mm
Glass	Made to measure	Not possible		
	Glass beveling	Not possible		
	Glass specifications	6 mm toughened safety glass (norm NBN 23-002, klasse NBN EN 12600)		
Finishing	Type of glass	101 Transparent		
	Glass treatment	109 Aquaclean		
	Characteristics	Rail with integrated Soft Open and Close systeem at the top of the glass Click-out system at the bottom for easy maintenance Wall profile on fixed panel, water-resistant profile		
	Hardware finish ### Finishing optional stabilisation bar	Shiny (011), White matte (088), Black matte (099) Additional stabilisation bar (only for X01.001.000) for installation as a freestanding wall Shiny 011 : 0019011 White matte 088 : 0019088 Black matte 099 : 0019099		
Service	Measuring	Possible with price supplement		
	Mounting Mounting instructions	Possible with price supplement Available		
Seals	Characteristics	UV-resistant according to Xenon UV-resistant according to Xenon test 1200 with cycle 120/18 Crystal-clear color according to Crystal-clear color according to RAU-PVC1107 Mold resistance according to DIN 5373		
Technical details	Advice	A profile or glass must always be placed on the tiling. Otherwise, this can lead to issues with waterproofing. When preparing, take into account the size and weight of the glass. Can the glass be brought into and installed in the bathroom.		


Technische fiche onderdelen/ Fiche technique accessoires

Slide Light

Nis width 1400mm

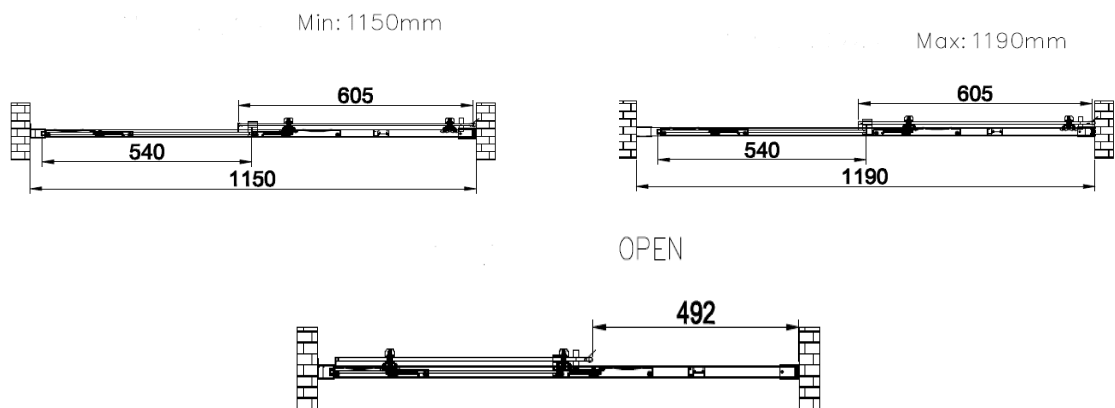

Nis width 1600mm

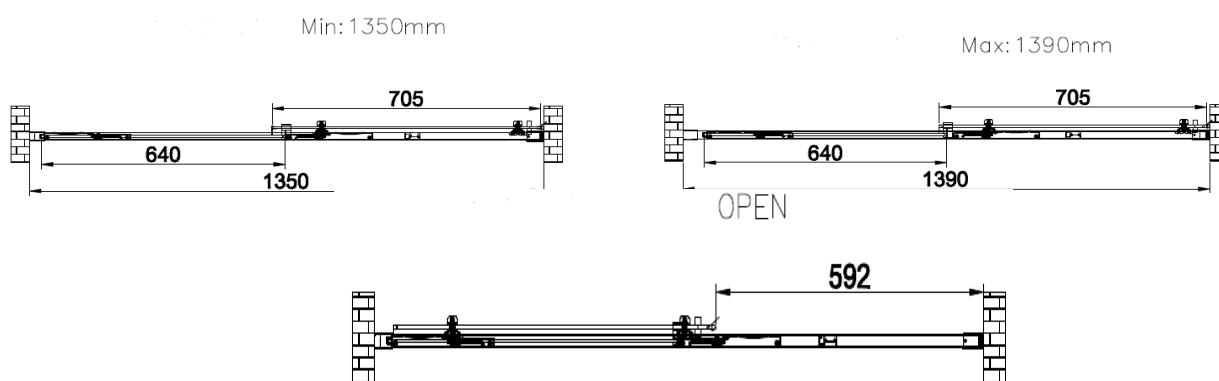

Nis width 1800mm

